

TWPC-3910-1 **BANDPASS CAVITY**



TWPC-3910-1

The Telewave TWPC-3910-1 is a 10" diameter, $\frac{1}{4}$ -wavelength, high "Q" bandpass cavity filter with superior selectivity. Bandpass cavities reject all frequencies outside a narrow pass band. These cavities reduce transmitter sideband noise, and also protect receivers against desensitization.

TWPC-3910 cavities cover 350-435 MHz. All cavities are tuned to specified frequencies prior to shipping, and no further adjustments should be required. The positive locking mechanism allows for quick field retuning if frequency changes become necessary.

These cavities also feature calibrated adjustable coupling, and insertion loss can be easily set from 0.5 dB to 2 dB or more

to improve selectivity. This allows cavity response to be optimized for any operating environment.

Excellent frequency stability is achieved by the use of a specially machined compensator and Invar rod. The pass frequency is temperature stable from -30°C to $+70^{\circ}\text{C}$. Telewave Ground Loop technology places the center conductor of each coupling loop at DC ground potential for lightning protection and noise reduction.


Heavy duty materials are used throughout each cavity to insure high performance and long life. Cavity top plates are machined from $\frac{1}{4}$ -inch aluminum, and are heliarc welded to the cavity body at the high current point for improved conductivity and strength. This

allows Telewave cavities to handle up to 350 watts, depending on insertion loss.

Similar metals and alodined aluminum help prevent galvanic corrosion. Silver plated tuners and beryllium copper finger stock provide non-corrosive low loss contact, and ensure reliable, long-term performance.

TWPC-3910-1

TYPICAL RESPONSE CURVE

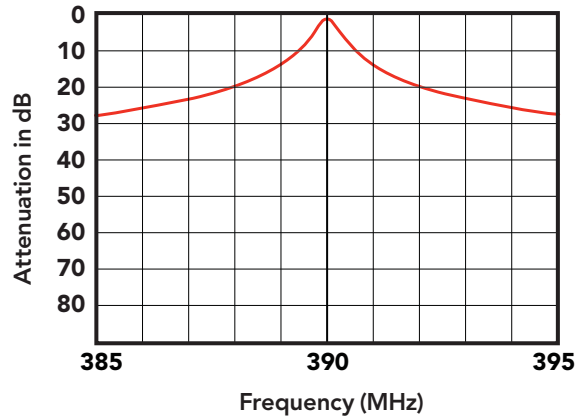

SPECIFICATIONS

Tuning frequency range	350-435 MHz
Insertion loss (adjustable)	0.5 to 2.0 dB
Attenuation at 1dB insertion loss	See graph
Nominal impedance	50 ohms
VSWR at resonance (max)	1.5:1
Input power (max) vs. insertion loss	0.5 dB - 350 watts, 1 dB - 250 watts, 2 dB - 150 watts
Temperature range	-30°C to +70°C
Cavity electrical length	¼ wavelength
Outer conductor, end plates	6061-T6 aluminum
Inner conductor, coupling loops	Silver plated copper
Tuning rod	Invar
Contactors, fingerstock	Beryllium copper
Cavity dimensions (Diam. x H) in. (cm)	10 x 13.25 (25.4 x 33.7)
Maximum dimensions with tuners extended in. (cm)	10 x 20.25 (25.4 x 51.4)
Connectors	N or UHF female (opt.)
Finish	Gray acrylic enamel
Net weight lb. (kg)	9 (4.1)
Shipping weight lb. (kg)	12 (5.5)

NOTE: When ordering be sure to specify exact frequency and model number.
Contact the factory if additional information or assistance is required.