

ANT400D, D3, D6-9

DIPOLE AND DIPOLE ARRAY 1 TO 9 dBd


The Telewave.io ANT400D series consists of single, dual, and 4-element dipole array antennas with a precision phasing harness for optimum performance. The antenna horizontal pattern is field-adjustable, for any current or future coverage requirements. The wide bandwidth and high efficiency of these antennas make them ideal for many applications, including military communications, TETRA trunking, and amateur radio.

Each dipole element is constructed with 6061-T6 aluminum, and welded at the base for maximum strength. Each antenna is also completely sealed with our high-tech Txylan™ coating, which resists water and ice buildup, and provides exceptional


protection from corrosive gases, UV radiation, salt spray, acid rain and windblown abrasives. The phasing harness is fully sealed by Telewave.io's Millennium Seal™ technology.

All components are at DC ground potential for lightning protection. Each dipole element includes a heavy-duty custom clamp set for mounting to a 1.5"-2.5" diameter galvanized steel support pipe or tower leg.


Up to 15 degrees of electrical uptilt or downtilt may be specified for D3 or D6-9 models. Desired tilt angle must be included on the order, and consultation with our antenna engineering staff is requested.




H-Plane gain 9.07 dBd
1/4 wl. spacing from tower



H-Plane gain 9.10 dBd
1/2 wl. spacing from tower



H-Plane gain 8.46 dBd
3/8 wl. spacing from tower

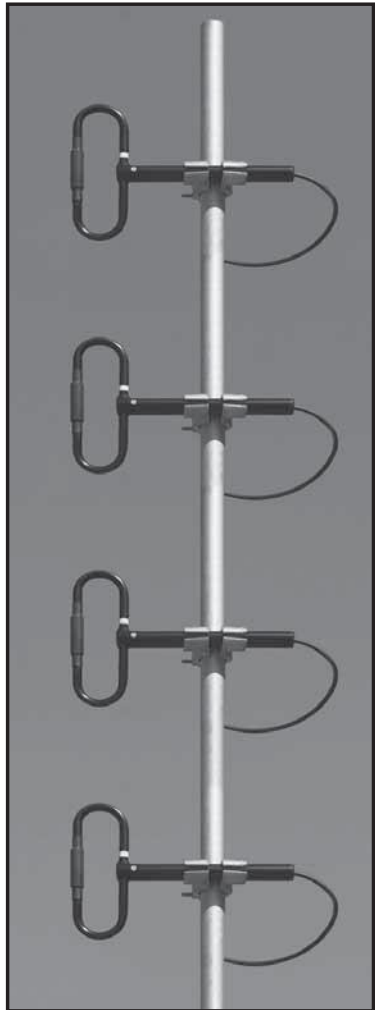

ANT400D6-9
(Harness not shown)
Support mast is customer-supplied

COMMON SPECIFICATIONS				
Frequency (continuous)	360-450 MHz	Lightning protection	DC Ground	
Power rating (typ.)	500 watts	Wind rating	175 MPH	
Impedance	50 ohms	(with 0.5" ice)	150 MPH	
VSWR	1.5:1 or less			
Pattern	Adjustable: Offset circular, cardioid, or bidirectional			
Termination	N-Male or 7-16 DIN (opt.) on harness feed cable			
MODEL SPECIFICATIONS		ANT400D	ANT400D3	ANT400D6-9
Gain (dependent on pattern)		1-2.5 dBd	3-6 dBd	6-9 dBd
Vertical beamwidth (3/8 wl.)		71°	34°	15°
Dimensions (H x D) (max)		15 x 14 in.	36 x 14 in.	74 x 14 in.
Weight (antenna + clamps)		6 lbs	13 lbs	18 lbs
Maximum exposed area		0.34 ft. ²	0.72 ft. ²	1.5 ft. ²
Lateral thrust at 100 MPH		13 lbs	30 lbs	64 lbs
Electrical uptilt / downtilt		N/A	1-15°	1-15°