

## ANT385F6

### FIBERGLASS COLLINEAR ANTENNA 6 dBd


The Telewave.io ANT385F6 is an extremely rugged, medium- gain, fiberglass collinear antenna, designed for operation in all environmental conditions. The antenna is constructed with brass and copper elements, connected at DC ground potential for lightning impulse protection.

All junctions are fully soldered to prevent RF intermodulation, and each antenna is completely protected within a rugged, high- tech radome to ensure survivability in the worst environments. The "Cool Blue" radome provides maximum protection from corrosive gases, ultraviolet radiation, icing, salt spray, acid rain, and wind blown abrasives.



The ANT385F6 includes an ANTC482 dual clamp set for mounting to a 1.5" to 3.5" O.D. support pipe. Stand-off and top mounts are also available.

Any sub model can be ordered as an inverted antenna.

NOTE: THIS ANTENNA IS SHIPPED VIA TRUCK FREIGHT ONLY

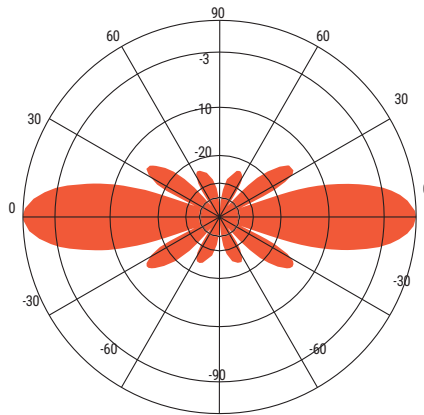

ANT385F6 - 385 MHz  
Vertical Plane Gain =  
6.12 dBd

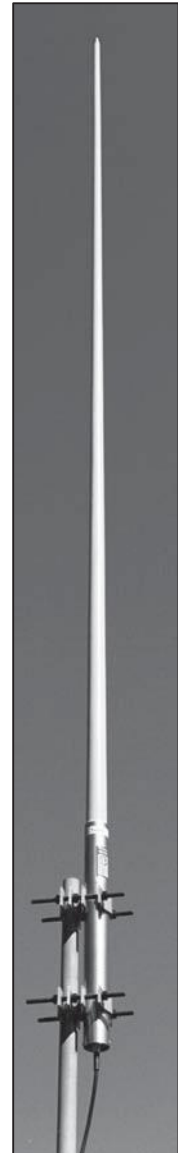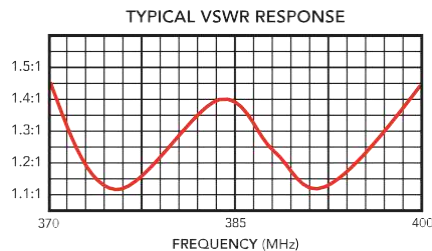

SPECIFICATIONS			
Frequency (continuous)	370-400 MHz	Dimensions (L x base diam.) in.	112 x 2.75
Gain	6 dBd	Tower weight (antenna + clamps)	26 lb.
Power rating (typ.)	500 watts	Shipping weight	33 lb.
Impedance	50 ohms	Wind rating / with 0.5" ice	165 / 125 MPH
VSWR	1.5:1 or less	Maximum exposed area	1.8 ft. <sup>2</sup>
Pattern	Omnidirectional	Lateral thrust at 100 MPH	73 lb.
Vertical beamwidth	18°	Bending moment at top clamp	126 ft. lb.
Termination	Recessed N Female 7-16 DIN-F opt.	(100 MPH, 40 PSF flat plate equiv.)	