

TWNC-1505-1,2 NOTCH CAVITIES



TWNC-1505-1



TWNC-1505-2

The Telewave TWNC-1505-1 and 1505-2 are 5" diameter, ¼-wavelength notch cavities with an adjustable coupling loop. Notch cavities are typically used together with Pass or Pass/Reject cavities to eliminate a particular frequency. Notch cavities have very low loss outside the notch band. Telewave can also "tilt" the notch response to move a notch very close to a pass frequency without adversely affecting the pass response.

TWNC-1505 cavities cover 148-174 MHz. All cavities are tuned to specified frequencies prior to shipping, and no further adjustments should be required. The positive locking mechanism allows for quick field re-tuning if frequency changes become necessary.

These cavities feature calibrated adjustable coupling, which can be easily changed to improve

selectivity. This allows cavity response to be optimized for any operating environment. At densely populated sites, the TWNC-1505-2 dual cavity filter provides greater selectivity with minimum insertion loss. Multiple cavities can also provide a wider notch when required. Mounting rails are provided for all multiple-cavity filters.

Excellent frequency stability is achieved by the use of a specially machined compensator and Invar rod. The pass and reject frequencies are temperature stable from -30°C to +70°C. Telewave Ground Loop technology places the center conductor of each coupling loop at DC ground potential for lightning protection and noise reduction.


Heavy duty materials are used throughout each cavity to insure high performance and long life.

Cavity top plates are machined from ¼-inch aluminum, and are heliarc welded to the cavity body at the high current point for improved conductivity and strength. This allows Telewave cavities to handle up to 350 watts, depending on insertion loss.

Rigid foam inserts support the tuner assembly allowing vertical or horizontal mounting. Similar metals and alodined aluminum help prevent galvanic corrosion. Silver plated tuners and beryllium copper finger stock provide non-corrosive low loss contact, and ensure reliable, long-term performance.

TWNC-1505-1,2

TYPICAL SELECTIVITY CHARACTERISTICS

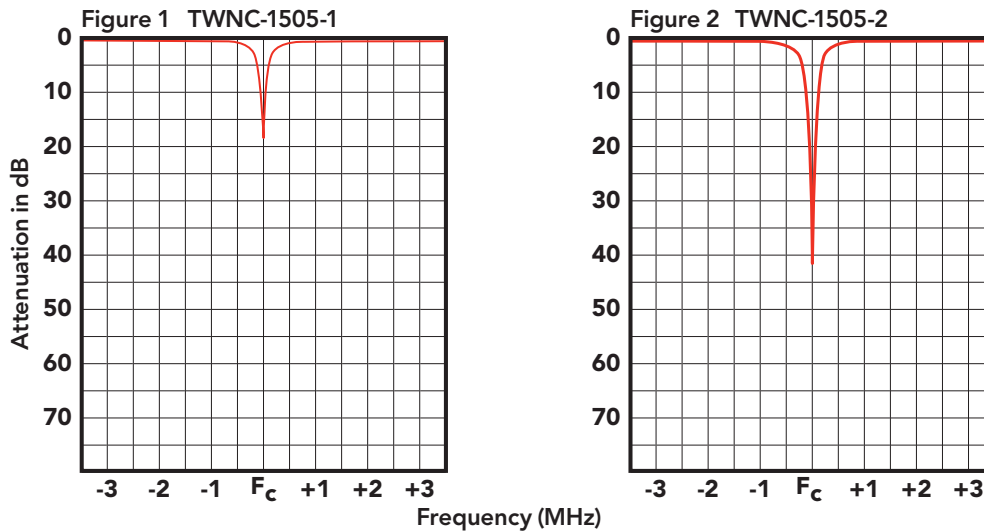

MODEL	TWNC-1505-1	TWNC-1505-2
Insertion loss (max)	0.2 dB	0.4 dB
Attenuation at notch frequency	See figure 1	See figure 2
Maximum dimensions with tuners extended in. (cm)	5 x 28 (13 x 71)	5.25 x 19 x 28 (13 x 48 x 71)
Net weight lb. (kg)	5 (2.3)	11 (5)
Shipping weight lb. (kg)	8 (3.6)	14 (6.5)
COMMON SPECIFICATIONS		
Tuning frequency range	148-174 MHz	
Nominal impedance	50 ohms	
VSWR at resonance (max)	1.5:1	
Input power (max)	350 watts	
Temperature range	-30°C to +70°C	
Cavity electrical length	¼ wavelength	
Outer conductor, end plates	6061-T6 aluminum	
Inner conductor, coupling loops	Silver plated copper	
Tuning rod	Invar	
Contactors, fingerstock	Beryllium copper	
Cavity dimensions (Diam. x H) in. (cm)	5 x 23.5 (13 x 60)	
Connectors	N or UHF female (opt.)	
Finish	Gray acrylic enamel	

NOTE: When ordering be sure to specify exact frequency and model number.
Contact the factory if additional information or assistance is required.