

ANT37D DIPOLE ANTENNA

The Telewave ANT37D is a rugged, high-performance single dipole antenna designed for VHF lowband services, including public safety, utilities, paging links and military communication. This antenna provides 6.5 MHz bandwidth with no tuning required, and multiple elements can be stacked for increased gain and pattern control.


Each antenna is constructed with 6061-T6 aluminum, and is welded at the base to a solid, machined aluminum mounting block for maximum strength.

Each antenna is also completely sealed with our high-tech Txylan™ coating, which resists water and ice buildup, and provides exceptional protection from corrosive gases, UV radiation, salt spray, acid rain and windblown abrasives.

ANT37D antennas include ANTC482 mounting hardware which will accommodate up to a 4" diameter galvanized steel support pipe or tower leg. Due to the size and potential wind loading of this antenna, tower side mounting is recommended.



SPECIFICATIONS	
Frequency (continuous)	33.5-41 MHz
Power rating (typ.)	500 watts
Impedance	50 ohms
VSWR	1.5:1 or less
Pattern	Offset circular
Lightning protection	DC Ground
Termination	N-Male or 7-16 DIN (opt.) on harness feed cable
Gain	2.5 dBd (typ.)
Vertical beamwidth	78 degrees
Horizontal beamwidth	170 degrees (typ.)
Dipole dimensions (H x W)	145 x 9 in.
Boom dimensions (L x Dia.)	96 x 3.5 in.
Weight (antenna + clamps)	51 lb.
Wind rating / 0.5" ice	125 / 100 MPH
Maximum exposed area	3.8 ft. ²
Lateral thrust at 100 MPH	152 lb

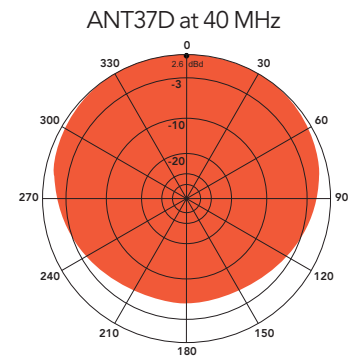

H-Plane gain 2.6 dBd
1/4 wl. spacing from tower