


ANT850F10

FIBERGLASS COLLINEAR ANTENNA 10 dBd


The Telewave.io ANT850F10 is an extremely rugged, high-gain, fiberglass collinear antenna, designed for operation in all environmental conditions. The antenna is constructed with brass and copper elements, connected at DC ground potential for lightning impulse protection.

All junctions are fully soldered to prevent RF intermodulation, and each antenna is completely protected within a rugged, high-tech radome to ensure survivability in the worst environments. The "Cool Blue" radome provides maximum protection from corrosive gases, ultraviolet radiation, icing, salt spray, acid rain, and wind blown abrasives.

The ANT850 F10 includes an ANTC482 dual clamp set for mounting to a 1.5" to 3.5" O.D. support pipe. Stand-off and top mounts are also available.

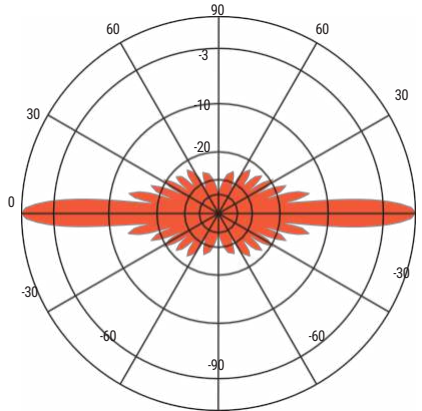

ANT850F10 - 850 MHz
Vertical Plane Gain =
10.10 dBd

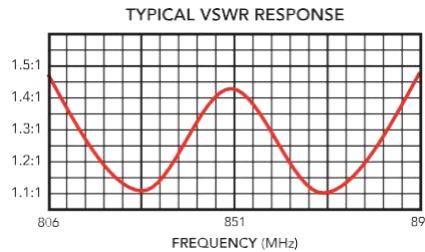

| SPECIFICATIONS | | | |
|------------------------|--------------------------------------|-------------------------------------|----------------------|
| Frequency (continuous) | 806-896 MHz | Dimensions (L x base diam.) in. | 83 x 2.375 |
| Gain | 10 dBd | Tower weight (antenna + clamps) | 19 lb. |
| Power rating (typ.) | 500 watts | Shipping weight | 23 lb. |
| Impedance | 50 ohms | Wind rating / with 0.5" ice | 200 / 150 MPH |
| VSWR | 1.5:1 or less | Maximum exposed area | 1.3 ft. ² |
| Pattern | Omnidirectional | Lateral thrust at 100 MPH | 53 lb. |
| Vertical beamwidth | 6° | Bending moment at top clamp | 106 ft. lb. |
| Termination | Recessed N Female 7-16 DIN-F opt. | (100 MPH, 40 PSF flat plate equiv.) | |